

ATEM Television Studio Pro HD



ATEM Television Studio Pro HD is the first production switcher designed for both broadcasters and AV professionals with a fully featured hardware control panel built in. It includes 4 SDI and 4 HDMI inputs with re-sync on all inputs so you can use it with broadcast or consumer cameras. ATEM Television Studio Pro HD is packed with high end features and is perfect for live production, episodic television programming, web shows, AV or even live coverage of gaming competitions! Simply plug in cameras, game consoles or computers and start switching live!

\$2,295

Connections

Total Video Inputs

8

Total Outputs

8

Total Aux Outputs

1

SDI Rates

270Mb, 1.5G, 3G.

Total Audio Inputs

2 x XLR.

Total Audio Outputs

None, embedded audio only.

SDI Video Input

4 x 10-bit SD/HD switchable. 2 channel embedded audio.

HDMI Video Inputs

4 x HDMI type A, 10-bit SD/HD switchable. 2 channel embedded audio.

Reference Inputs

Tri-Sync or Black Burst.

Video Input Re-Sync

On all 8 inputs.

SDI Program Outputs

5 x 10-bit SD/HD switchable.

SDI Audio Outputs


2 Ch embedded into SDI output.

Multi View Monitoring

1

Multi View Video Standard

1 x HD-SDI and 1 x HDMI.

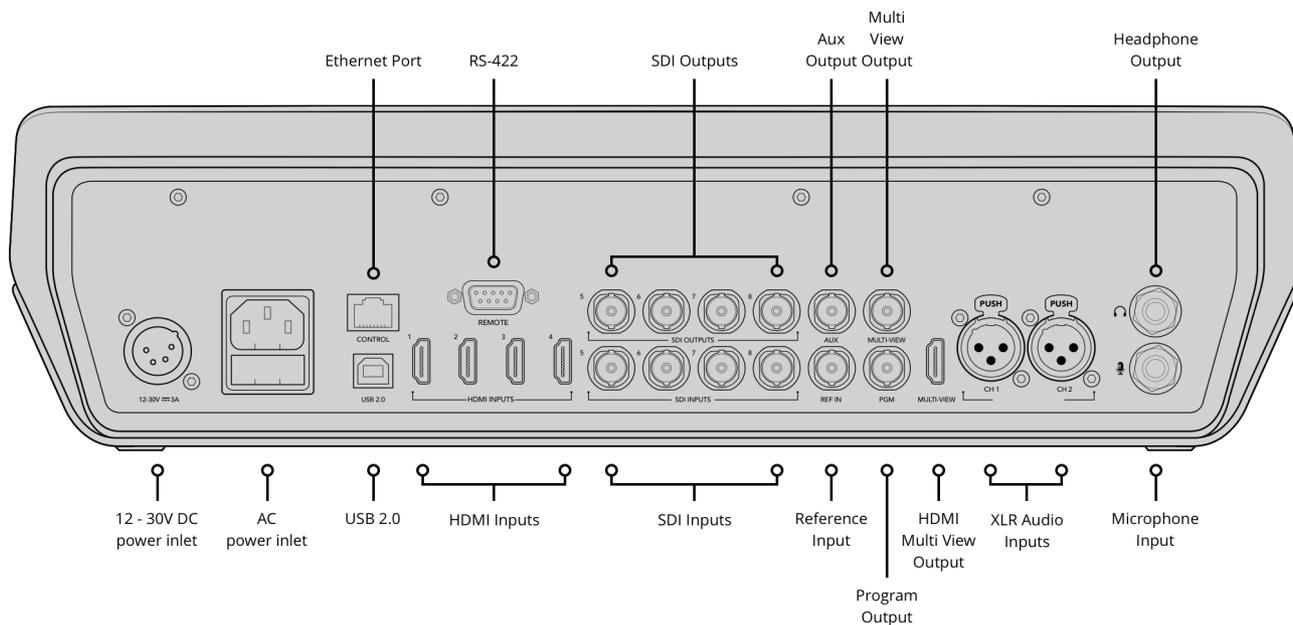

Standards

SD Video Standards

525i59.94 NTSC 4:3 or 16:9, 625i50
PAL 4:3 or 16:9

HD Video Standards

720p50, 720p59.94, 1080p23.98,
1080p24, 1080p25, 1080p29.97,
1080p50, 1080p59.94, 1080i50,
1080i59.94

SDI Compliance

SMPTE 259M, 292M and 424M.

Video Sampling

4:2:2 10-bit

Color Precision

4:2:2 10-bit

Color Space

4:2:2 YUV

HDMI Input Resolutions for Computers

720 x 480i 59.94Hz, 720 x 576i 50Hz,
1280 x 720p 59.94Hz 50Hz and 1920
x 1080p 23.98, 24, 25, 29.97,30, 50,
59.94 and 1920 x 1080i 50 and
59.94Hz 60Hz.

Colorspace Conversion

Hardware based real time.

Processing Delay

6 Lines.

Audio Mixer

10 input x 2 channel mixer.
Selectable On/Off/Audio-Follow-Video
per channel plus separate gain
control per channel.
Level and Peak metering.
Master gain control. Headphone
output level control with separate
mix of Program, Talkback and
Sidetone.

Product Specifics

Upstream Keys

1

Downstream Keys

2

Chroma Keys

1

Linear/Luma Keys

3

Talkback Support

Built in, uses aviation headset.

Mix Minus Support

Yes, on 4 camera PGM outputs.

Transition Keyer (Stinger/DVE)

DVE only.

Total Number of Layers

5

Pattern Generators

2

Color Generators

2

DVE with 3D Borders & Drop**Shadow**

1

Interface

Minimum monitor resolution of 1366 x 768.

Number of Windows

1 x 10

Routable Windows

8 routable and 2 fixed for Program and Preview.

Tally

Red for program and green for preview indication.

Tally Output

Added via ethernet connection to Blackmagic Design GPI and Tally Interface product. (Not included)

Windows Source Labels

Yes.

Multi View Monitoring

Multi View Monitoring

1 x 10 Views.

Multi View Video Standard

HD

Media Player

Media Players

2, with non volatile flash memory.

Media Pool Still Image Capacity

20 with fill and key.

Channels

Fill and key for each Media Player.

Media Pool Still Image Format

PNG, TGA, BMP, GIF, JPEG and TIFF.

Control

Control Panel

Built in with camera control. Software panel included. Supports optional broadcast panel.

Control Panel Compatibility

Includes ATEM Software Control Panel. Also compatible with ATEM 1 M/E Broadcast Panel and ATEM 2 M/E Broadcast Panel.

Control Panel Included

ATEM Software Control Panel included free for Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra or later and Windows 8.1 64-bit or Windows 10 64-bit.

Software

Software Updates

Using USB connection directly connected to Mac OS X or Windows computers. Includes ATEM Switcher Utility.

Configuration

Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Switcher Utility connected via USB to chassis.

Operating Systems



Mac OS X 10.10 Yosemite,
Mac OS X 10.11 El Capitan or later.



Windows 8.1 64-bit or Windows 10
64-bit.

Power Requirements

Power Supply

1 x Internal 110 - 240V AC. 4 pin 12V
DC.

Power Usage

40W

Physical Specifications



Environmental Specifications

Operating Temperature:

5° C to 40° C

Storage Temperature:

-20° to 60° C (-4° to 140° F)

Relative Humidity:

0% to 90% non-condensing

What's Included

AEM Television Studio Pro HD

SD card with software and manual

Warranty

12 Months Limited Manufacturer's
Warranty.

Repair policy

Warranty details can be found in the ATEM Switchers Operation Manual in the support page at www.blackmagicdesign.com.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2017, all rights reserved. All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller