

ATEM 4 M/E Constellation IP



ATEM 4 M/E Constellation IP is an advanced live production switcher with a powerful design that's fully SMPTE-2110 native and uses high speed 100G Ethernet connections! This makes it easy to add a converter for a mix of traditional 12G-SDI or modern SMPTE-2110 IP video connections. Plus, all IP video connections are fully redundant and SMPTE-2022-7 compliant. You get 32 inputs and 32 outputs, 16 ATEM Advanced Keyers, 4 multi-views and 2 SuperSource processors for a total of 12 DVEs.

\$8,795

Connections

100G 2110 IP Networks

8 x 100G QSFP28 connections. Supports ST 2022-7 redundant delivery of IP streams over two 2110 networks.

Senders and Receivers per 100G Pair

8 x Ultra HD

10G Control Network

2 x 10G RJ45 Ethernet for NMOS control plus loading media, saving and loading presets.

Reference Network

2 x RJ45 Ethernet for 2110 PTP clock.

1G Management

1 x RJ45 Ethernet. Supports 10/100/1000 BASE-T. For ATEM Setup utility and software updates.

Analog Audio Outputs

1 x 6.35 mm headphone jack.

Total Video Inputs

32

Total Video Outputs

32

Total Aux Outputs

32

Total Audio Outputs

1 x 6.35 mm headphone jack.
1 x Speaker

Frame Rate and Format Converters

On all 32 inputs

Extra Audio Outputs

1 x 6.35 mm headphone jack. (the audio will be the mix of PGM plus engineering, production and side tone.)
1 x built-in speaker.

Program Outputs

Any of the 32 outputs.

Preview Outputs

Any of the 32 outputs.

Multiview Outputs

4 of any of the 32 outputs.

Webcam Output

Rear USB-C supports 720p or 1080p at PGM frame.

Control Panel Connection

2 x 10G RJ45 Ethernet for panel connection, NMOS control plus loading media, saving and loading presets.

Internal Timecode Generator


Yes

Computer Interface

Rear USB-C supports USB 3.0 for external USB audio (Fairlight Live), webcam out, ATEM Setup utility and software updates.
Front USB-C supports USB 2.0 for updates and setup only.

Power

2 x IEC C14 power inputs.

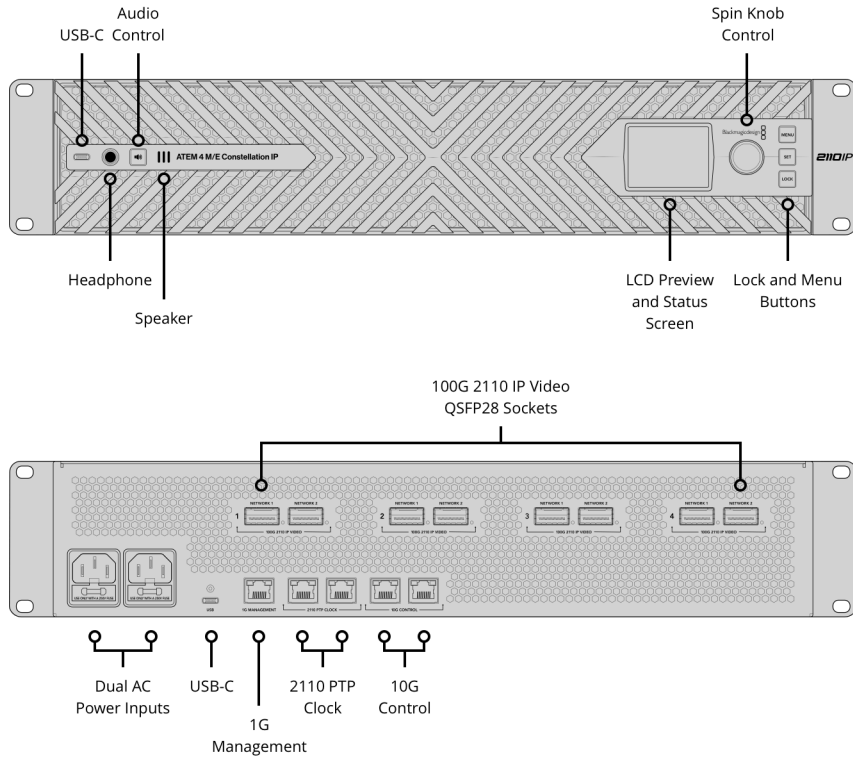

Standards

HD Video Standards

720p50, 720p59.94, 720p60
 1080i50, 1080i59.94, 1080i60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p47.95,
 1080p48, 1080p50, 1080p59.94,
 1080p60

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30, 2160p50,
 2160p59.94, 2160p60.

Video Sampling

4:2:2

Color Precision

10-bit.

SMPT E Compliance

SMPT E 2110-20, SMPT E 2110-21,
 SMPT E 2110-30, SMPT E 2110-40,
 SMPT E 2022-7

IP Video Compliance

SMPT E 2110-20

(Uncompressed Video)

IGMP v2

SMPT E 2110-21 (Traffic Shaping)

Sender: Narrow

Receiver: Narrow, Wide Synchronous,
 Asynchronous

SMPT E 2110-30 (PCM)

Audio Conformance level: Level C

SMPT E 2110-40 (Ancillary Data)

Full access to entire SMPT E ancillary
 data stream. Includes RP 188/SMPT E
 12M-2, closed captioning and HDR
 static metadata.

Codec

Blackmagic IP10 codec optional for
 2160p59.94 and 2160p60 as 2110 IP
 video.

Precision Time Protocol

IEEE 1588-2008 (PTP v2)

ST 2059-1

ST 2059-2

NMOS IS-04 Discovery and

Registration

v1.3.2

Peer-to-peer via mDNS/DNS-SD

NMOS IS-05 Connection**Management**

v1.1.2

NMOS BCP-002-01

Natural Grouping

NMOS BCP-004-01Receiver capabilities

Product Specifics

Upstream Keyers

16

Linear/Luma Keyers

20

Control

2 x 10G RJ45 Ethernet for panel connection, NMOS control plus loading media, saving and loading presets.

Downstream Keyers

4

Transition Keyer (Stinger/DVE)

4 Stinger, 4 DVE.

Routable Windows

64

Advanced Chroma Keyers

16

Total Number of Layers

28

SuperSource

2

Pattern Generators

21

Tally

Red for program and green for preview indication.

Talkback Support

Yes

Color Generators

2

Windows Source Labels

Yes

Mix Minus Support

Yes

DVEs4

Multi View Monitoring

Multi View Monitoring

4 x 16 Multi View pattern options for up to 64 total views.

Multi View Video StandardFollows Switcher Standard.

Media Player

Media Players

4

Media Player Clip Length in 720 HD

3200 frames

Media Pool Video File Format

TGA Sequence.

Channels

Fill and key for each media player.

Media Player Clip Length in 1080 HD

1600 frames

Media Pool Audio File Format

WAV, MP3 and AIFF.

Media Pool Still Image Capacity

64

Media Player Clip Length in Ultra HD

400 frames

Media Pool Clip Capacity

4

Media Pool Still Image FormatPNG, TGA, BMP, GIF, JPEG and TIFF.

Display

Interface

Minimum monitor resolution of 1366 x 768.

Front panel

Built in HD LCD monitor for video, front USB-C connection for updates, setup and control, front speaker and headphone connection, menu control knob and set button, front panel lock button.

Processing

Processing Delay

TBC

Audio Mixer

68 Channel mixer.
Fully integrates with Fairlight Live.
[Learn More](#)

Selectable On/Off/Audio-Follow-Video.

Level and Peak metering.

Master gain control.

6 band parametric EQ, Dynamics including Expander, Gate, Compressor and Limiter.

Down Conversion

None

Control

Front panel

Built in HD LCD monitor for video, front USB-C connection for updates, setup and control, front speaker and headphone connection, menu control knob and set button, front panel lock button.

Software

Control Panel Included

ATEM Software Control Panel included free for macOS 14.0 Sonoma, macOS 15.0 Sequoia or later and Windows 10 and 11.

Software Updates

Using USB or Ethernet connection directly connected to Mac or Windows computers. Includes ATEM Setup Utility.

Configuration

Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Setup Utility connected via USB-C to chassis.

Operating Systems



Mac 15.0 Sequoia,
Mac 26.0 Tahoe or later.



Windows 10 and 11.
Windows 11 for ARM

Power Requirements

Power Supply

2 x 100 - 240V AC 50/60Hz internal
power supplies.


Power Inputs

2 x IEC C14 sockets.

Power Usage

TBC

Physical Specifications

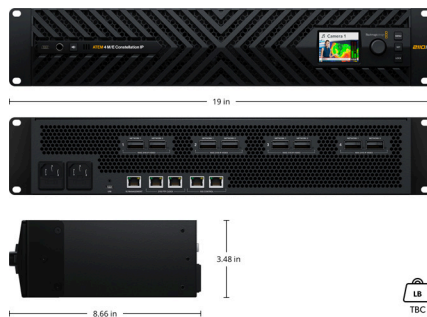

Physical Installation

Physical Installation

2 rack units.

Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing

What's Included

ATEM 4 M/E Constellation IP

Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller