

## Blackmagic URSA Mini Pro 4.6K G2



**\$5,995**

URSA Mini Pro 4.6K G2 is a next generation digital film camera with updated electronics and a high performance 4.6K HDR image sensor for shooting at up to 300 frames per second. You get a Super 35mm 4.6K sensor with 15 stops of dynamic range, built in optical ND filters, interchangeable EF lens mount that can be swapped for optional PL, B4 or F mounts, Blackmagic RAW and ProRes recording to dual CFast or dual SD cards, and an innovative USB-C expansion port for recording directly to external disks. In addition, URSA Mini Pro 4.6K G2 features a massive set of external broadcast style controls, backlit status display, foldout touchscreen monitor and more!

### Camera Features

#### Effective Sensor Size

25.34mm x 14.25mm (Super35)

#### Lens Mount

EF mount included. Interchangeable with optional PL, B4 and F lens mounts.

#### Lens Control

Electronic control via EF mount pins or 12pin broadcast connector for compatible lenses

#### Dynamic Range

15 Stops.

#### Shooting Resolutions

4608 x 2592, 4608 x 1920 (4.6K 2.40:1), 4096 x 2304 (4K 16:9), 4096 x 2160 (4K DCI), 3840 x 2160 (Ultra HD), 3072 x 2560 (3K Anamorphic), 2048 x 1152 (2K 16:9), 2048 x 1080 (2K DCI), 1920 x 1080

#### Frame Rates

Maximum sensor frame rate dependent on resolution and codec selected. Project frame rates of 23.98, 24, 25, 29.97, 30, 50, 59.94 and 60 fps supported.

#### High Speed Frame Rates

Blackmagic RAW 8:1  
4.6K Full - Up to 120 fps  
UHD Windowed - Up to 150 fps  
HD Windowed - Up to 300 fps  
ProRes 422 HQ  
4.6K Full - Up to 80 fps  
UHD Windowed - Up to 120 fps  
HD Windowed - Up to 240 fps

#### Built in ND Filters

Four position ND filter wheel with clear, 2-stop, 4-stop and 6-stop ND filters.

#### Focus

Focus button triggers auto focus when using compatible lenses with focus servo. Touch and hold on LCD determines focus region and triggers auto focus.

#### Iris Control

Iris wheel and touchscreen slider for manual iris adjustment on electronically controllable lenses, iris button for instant auto iris settings on compatible lenses so no pixel is clipped in film mode. Scene average auto exposure in video mode.

#### Screen Dimensions

4 inch

#### Screen Type

LCD capacitive touchscreen.

---

**Metadata Support**

Automatically populated lens data from electronic EF, B4 and i/Technology compatible PL lenses. Automatic recording of camera settings and slate data such as project, scene number, take and special notes.

**Controls**

Touchscreen menus on 4 inch screen.  
Push buttons for other controls.  
2 assignable shortcut keys.

**Timecode Clock**

Highly accurate timecode clock. Less than 1 frame drift every 8 hours.

---

**Connections****Total Video Inputs**

1 x SDI

**Total Video Outputs**

1 x SDI, 1 x SDI Monitoring.

**SDI Rates**

1.5G, 3G, 6G, 12G.

**Analog Audio Inputs**

2 x XLR analog switchable between mic, line and AES audio. Phantom power support.

**Analog Audio Outputs**

1 x 3.5mm headphone jack, supports iPhone microphone for talkback.

**Reference Inputs**





Tri-Sync/Black Burst/Timecode.

**Remote Control**

2 x 2.5mm LANC input for Rec Start/Stop, plus Iris and Focus control using compatible lenses.

**Computer Interface**

USB Type-C 3.1 Gen 1 for external drive recording and software updates.

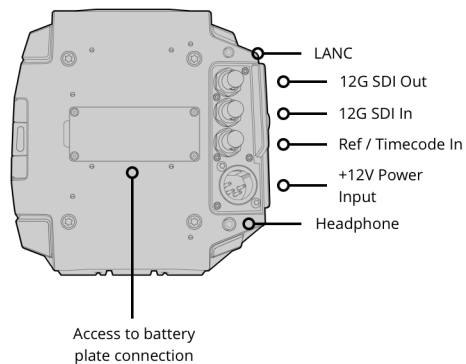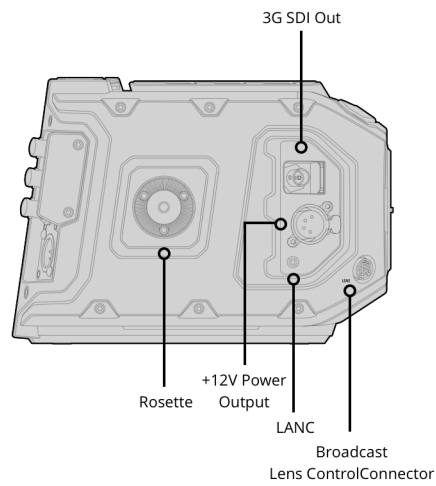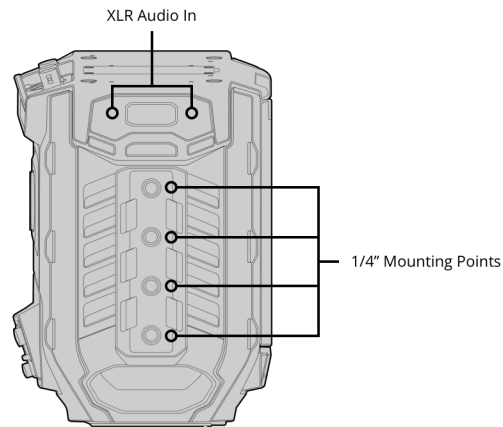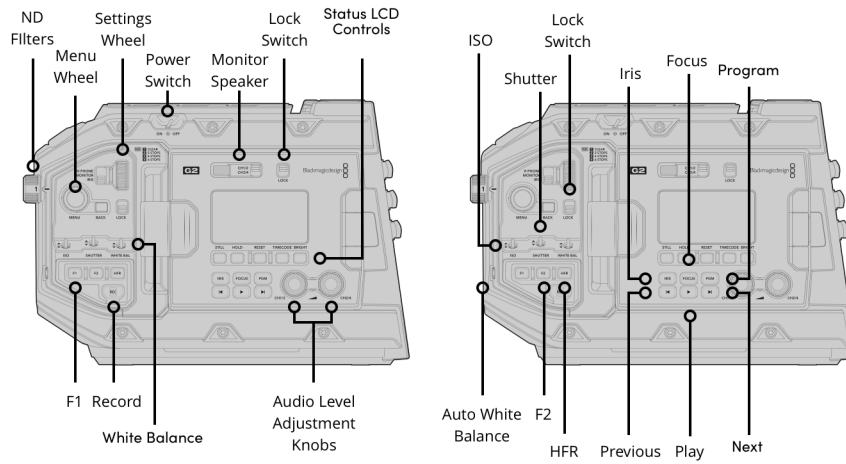

---

## Audio

### Microphone

Integrated stereo microphone.

### Built in Speaker

1 x mono speaker.

---

## Standards

### SD Video Standards

None.

### HD Video Standards

1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60, 1080i50,  
1080i59.94, 1080i60

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
2160p29.97, 2160p30, 2160p50,  
2160p59.94, 2160p60

### SDI Compliance

SMPTE 292M, SMPTE 424  
level A and B, SMPTE 2081-1, SMPTE  
2082-1

### SDI Audio Sampling

48 kHz and 24 bit

---

## Media

### Media

2 x CFast 2.0 card slots, 2 x SD UHS-II  
card slots, 1 x USB-C 3.1 Gen 1  
expansion port for external media for  
Blackmagic RAW and  
ProRes recording.  
Please refer to either the Manual or  
the Information Note  
at [www.blackmagicdesign.com/](http://www.blackmagicdesign.com/)  
support for compatible media.

### Media Format

Can format media to ExFAT  
(Windows/Mac) or HFS+ (Mac)  
file systems.

---

## Supported Codecs

### Codecs

Blackmagic RAW Constant Bitrate 3:1,  
Blackmagic RAW Constant Bitrate 5:1,  
Blackmagic RAW Constant Bitrate 8:1,  
Blackmagic RAW Constant Bitrate  
12:1,  
Blackmagic RAW Constant Quality Q0,  
Blackmagic RAW Constant Quality Q5,  
Apple ProRes XQ QuickTime, Apple  
ProRes 444 QuickTime,  
Apple ProRes 422 HQ QuickTime,  
Apple ProRes 422 QuickTime,  
Apple ProRes 422 HQ QuickTime,  
Apple ProRes 422 LT QuickTime and  
Apple ProRes 422 Proxy QuickTime.

---

## Control

### External Control

Blackmagic SDI Control Protocol, iPad control, Bluetooth control, 2 x 2.5mm LANC for lens and record control.

---

## Color Corrector

### Color Corrector

DaVinci YRGB.

---

## Talkback and Tally

### Talkback

SDI Channels 15/16 and iPhone headset.

### Live Tally Indicator

Tally on LCD, URSA Viewfinder and URSA Studio Viewfinder.

---

## Storage Features

### Storage Type

2 x CFast 2.0

2 x SD UHS-II cards

1 x high speed USB-C expansion port for external media.

---

## Storage Rates

Storage rates based on 30 frames per second.

4608 x 2592

Blackmagic RAW 3:1 - 183 MB/s

Blackmagic RAW 5:1 - 110 MB/s

Blackmagic RAW 8:1 - 68 MB/s

Blackmagic RAW 12:1 - 46 MB/s

Blackmagic RAW Q0 - 110 to 274 MB/s \*

Blackmagic RAW Q5 - 27 to 78 MB/s \*\*

Apple ProRes XQ - 360 MB/s

Apple ProRes 444 - 238 MB/s

Apple ProRes HQ - 158 MB/s

Apple ProRes 422 - 106 MB/s

Apple ProRes LT - 73.5 MB/s

Apple ProRes Proxy - 32.3 MB/s

3840 x 2160

Blackmagic RAW 3:1 - 127 MB/s

Blackmagic RAW 5:1 - 76 MB/s

Blackmagic RAW 8:1 - 48 MB/s

Blackmagic RAW 12:1 - 32 MB/s

Blackmagic RAW Q0 - 76 to 191 MB/s \*

Blackmagic RAW Q5 - 19 to 55 MB/s \*\*

Apple ProRes XQ - 250 MB/s

Apple ProRes 444 - 165 MB/s

Apple ProRes HQ - 110 MB/s

Apple ProRes 422 - 73.6 MB/s

Apple ProRes LT - 51 MB/s

Apple ProRes Proxy - 22.4 MB/s

1920 x 1080

Blackmagic RAW 3:1 - 33 MB/s

Blackmagic RAW 5:1 - 20 MB/s

Blackmagic RAW 8:1 - 12 MB/s

Blackmagic RAW 12:1 - 8 MB/s

Blackmagic RAW Q0 - 20 to 49 MB/s \*

Blackmagic RAW Q5 - 5 to 14 MB/s \*\*

Apple ProRes XQ - 62.5 MB/s

Apple ProRes 444 - 41.25 MB/s

Apple ProRes HQ - 27.5 MB/s

Apple ProRes 422 - 18.4 MB/s

Apple ProRes LT - 12.75 MB/s

Apple ProRes Proxy - 5.6 MB/s

\* Constant Quality setting Q0 storage rates quoted are indicative only, based on a 2:1 - 5:1 compression range.

\*\* Constant Quality setting Q5 storage rates quoted are indicative only, based on a 7:1 - 20:1 compression range.

Actual storage rates are entirely dependent on image subject matter.

## Recording Formats

Blackmagic RAW Q0, Q5, 3:1, 5:1, 8:1

and 12:1 at 4608 x 2592, 4608 x 1920,

4096 x 2304, 4096 x 2160, 3840 x

2160, 3072 x 2560, 2048 x 1152, 2048

x 1080 and 1920 x 1080 with film,

extended video or video

dynamic range.

ProRes at 4608 x 2592, 4608 x 1920,

4096 x 2304, 4096 x 2160, 3840 x

2160, 3072 x 2560, 2048 x 1152, 2048

x 1080 and 1920 x 1080 with film,

extended video or video

dynamic range.

---


## Software

### Software Included

Blackmagic OS  
DaVinci Resolve Studio for Mac and Windows including activation key  
Blackmagic Camera Setup  
Blackmagic RAW Player  
Blackmagic RAW QuickLook Plugin  
Blackmagic RAW SDK

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---

## Power Requirements

### Power Supply

1 x External 12V power supply. 12 pin Molex connector for rear battery plate.

### External Power Input

1 x 4 pin XLR port for external power or battery use.  
1 x 12 pin Molex connector on rear battery plate.  
Custom V-mount battery plate with D-tap +12V regulated output from camera.

### Power

Rear camera mount compatible with industry standard V-mount or gold mount battery plates.

---


# Accessories

## Optional Accessories

- URSA Mini Pro PL, EF, B4 and F Mounts
- URSA Mini Pro Shim Kit
- URSA Mini Shoulder Kit including top handle and extender arm
- URSA Viewfinder
- URSA Studio Viewfinder
- URSA Mini SSD Recorder
- URSA VLock Battery Plate
- URSA Gold Battery Plate
- URSA Mini Mic Mount
- URSA Mini Top Handle
- URSA Handgrip
- Blackmagic Camera Fiber Converter

---

# Physical Specifications

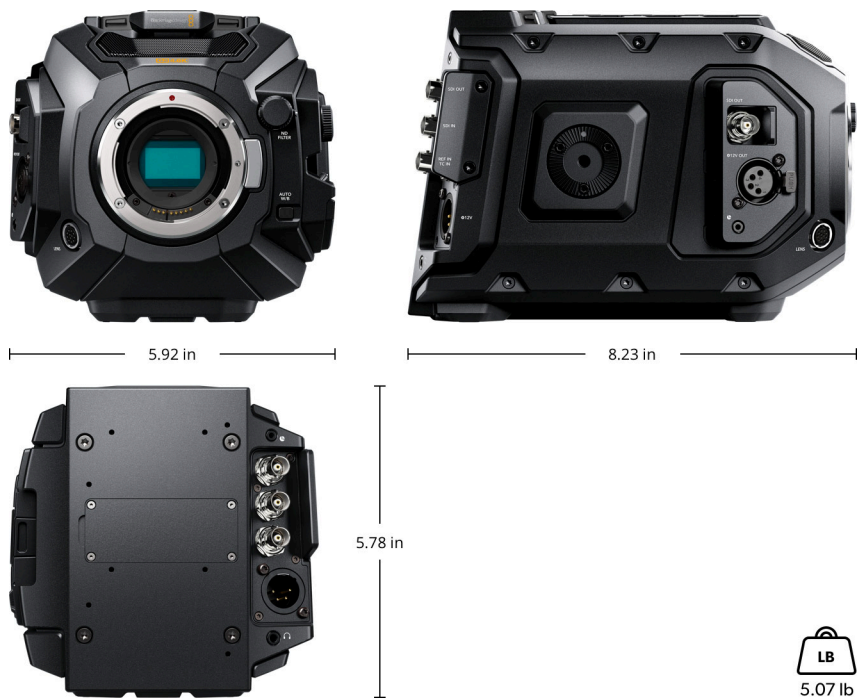

---

# Environmental Specifications

## Operating Temperature

0° to 40°C (32° to 104°F)

## Storage Temperature

-20° to 45°C (-4° to 113°F)

## Relative Humidity

0% to 90% non-condensing



---

## What's Included

Blackmagic URSA Mini Pro 4.6K G2 body  
Turret dust cap  
EF lens mount  
Power supply  
Welcome wallet with QR code for software download  
DaVinci Resolve Studio with activation key

---

## Warranty

12 Month Limited Manufacturer's  
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller