


## DeckLink Duo 2

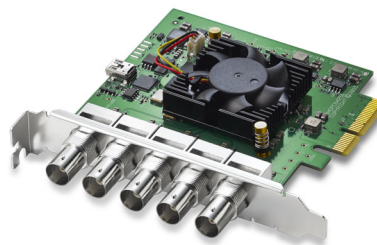

Featuring 4 independent 3G-SDI connections, DeckLink Duo 2 is a PCIe capture and playback card that supports SDI formats in SD and HD up to 1080p60! You get the flexibility of 4 separate capture or playback cards in one! Plus, it's completely customizable so it's perfect for media play-out systems, multi screen digital signage servers, real time multi channel capture systems and more!

**\$495**

### Connections

#### SDI Video Input

4 x bidirectional 12-bit SD/HD independently configurable as either Input or Output

#### SDI Video Output

4 x bidirectional 12-bit SD/HD independently configurable as either Input or Output

#### SDI Audio Input

16 channels embedded in SD and HD

#### SDI Audio Output


16 channels embedded in SD and HD

#### Sync Input

Blackburst in SD 720p50, 720p59.94, 1080i50 and 1080i59.94 formats or Tri-Sync in any HD format.

#### Computer Interface

PCI Express 4 lane, compatible with 4 and 8 lane PCIe slots.

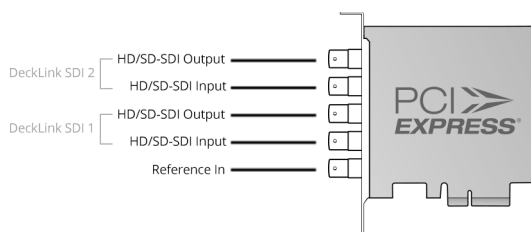

### Codecs

Supports: AVC-Intra, AVCHD, Canon XF MPEG2, Digital SLR, DV-NTSC, DV-PAL, DVCPRO50, DVCPROHD, DPX, HDV, HEVC, XDCAM EX, XDCAM HD, XDCAM HD422, Apple ProRes 4444, Apple ProRes 422 HQ, Apple ProRes 422, Apple ProRes LT, Apple ProRes 422 Proxy, Uncompressed 8-bit 4:2:2, Uncompressed 10-bit 4:2:2, Uncompressed 10-bit 4:4:4

---

## Software

### Software Included

Media Express, Disk Speed Test, LiveKey, Blackmagic Desktop Video Utility and Blackmagic driver on Mac OS X. Media Express, Disk Speed Test, LiveKey, Blackmagic Desktop Video Utility and Blackmagic driver on Windows 8 and Windows 10. Blackmagic Desktop Video Utility and Blackmagic driver on Linux

### Internal Software Upgrade

Firmware built into software driver. Loaded at system start or via updater software.

### Physical Installation

PCI Express 4 lane, compatible with 4 and 8 lane PCI Express slots on Mac OS X, Windows 7, Windows 8, Windows 10 and Linux. Mac OS X systems require a Mac Pro computer with PCI Express slots. Please check the Support pages to see the full system requirements.

---

## Software Applications



DaVinci Resolve



Fusion 8



Final Cut Pro X



Premiere Pro CC



Avid Media Composer



After Effects CC



Avid Pro Tools



Steinberg Cubase



Steinberg Nuendo



Photoshop CC

**Other supported applications include:** Nuke, Steinberg Nuendo, Avid Symphony, Avid News Cutter, Tools On Air just:in & live:cut & just:play & just:live, Softron OnTheAir, MovieRecorder and OnTheAir CG, Flash Media Live Encoder, Flash Media Encoder, Wirecast, Livestream Procaster, Resolume Avenue 4, Sony Vegas Pro, Corel VideoStudio Pro X4, CyberLink Power Director, MAGIX Video Pro X4, Vidblaster Pro & Studio & Broadcast, Uniplay, Playbox AirBox, CasparCG, Magicsoft CG, Xsplit Broadcaster, Imagine Communications Velocity & InfoCaster.

---

## Video Standards

### SD Format Support

525i29.97 NTSC, 625i25 PAL

### HD Format Support

720p50, 59.94, 60  
1080p23.98, 24, 25, 29.97, 30, 50, 59, 59.94, 60  
1080PsF23.98, 24, 25, 29.97, 29.97, 30  
1080i50, 59.94, 60

### SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 425M A/B

### SDI Metadata Support

VITC read for 3:2 pulldown removal. VANC capture and playback using up to 3 lines of video in file. HD RP188 and closed captioning.

### Audio Sampling

Television standard sample rate of 48 kHz and 24 bit.

### Video Sampling

4:2:2, 4:4:4

### Color Precision

8, 10-bit YUV 4:2:2 and 8, 10, 12-bit RGB 4:4:4

### Color Space

REC 601, REC 709

---

## Processing

### Colorspace Conversion

Hardware based real time

### HD Up Conversion

Built in, high quality software up conversion from SD to 720HD or 1080HD on input. Selectable between 4:3 pillarbox, 14:9 zoom and 16:9 zoom

### Real Time Effects

Final Cut Pro X internal effects. Premiere Pro CC Mercury Playback Engine effects. Avid Media Composer internal effects.

---

---

### HD Down Conversion


Built in, high quality software down converter from HD to SD on output. Down converted SD selectable between letterbox, anamorphic 16:9 and center cut 4:3 styles.

### Cross Conversion

Built-in, high quality hardware cross conversion from 720HD to 1080HD, 1080HD to 720HD on playback

---

## Physical Specifications

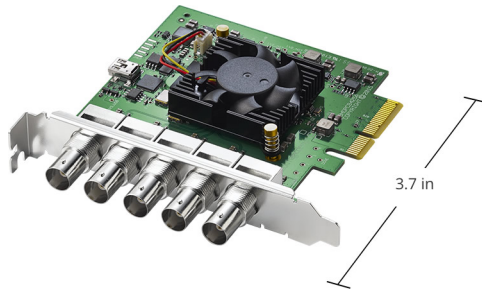

oz  
5.64 oz

---

## Operating Systems



Mac OS X 10.9 Mavericks,  
Mac OS X 10.10 Yosemite,  
Mac OS X 10.11 El Capitan  
or later.



Windows 7, 8 and 10,  
all 64-bit.



Linux

---

## EMC Certifications

FCC, CE and C-Tick

---

## Environmental Specifications

### Operating Temperature

5° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

DeckLink Duo 2  
SD card with software and manual

---

## Warranty

3 Year Limited Manufacturer's Warranty.

---

All items on this website are copyright Blackmagic Design Pty. Ltd. 2016, all rights reserved.  
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller